

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No.

35 C14082

First Named Inventor or Application Identifier

RYOJI FUKUDA

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages **71**

3. ☒ Drawing(s) (35 USC 113) Total Sheets **9**

4. ☒ Oath or Declaration Total Pages **1**

a. ☐ Newly executed (original or copy)

b. ☒ Unexecuted for information purposes

c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
(Note Box 5 below)

i. ☐ **DELETION OF INVENTOR(S)**

Signed Statement attached deleting
inventor(s) named in the prior application, see
37 CFR 1.63(d)(2) and 1.33(b).

5. ☐ Incorporation By Reference (Useable if Box 4c is checked)

The entire disclosure of the prior application, from which a copy of
the oath or declaration is supplied under Box 4c, is considered as
being part of the disclosure of the accompanying application and is
hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program (Appendix)

7. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

a. ☐ Computer Readable Copy

b. ☐ Paper Copy (identical to computer copy)

c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☐ Assignment Papers (cover sheet & document(s))

9. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney

10. ☐ English Translation Document (if applicable)

11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations

12. ☒ Preliminary Amendment

13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

14. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired

15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. ☐ Other: _____

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/____

18. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label

05514

(Insert Customer No. or Attach bar code label here)

or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	105*-20 =	85	X \$ 18.00 =	\$1530.00
	INDEPENDENT CLAIMS (37 cfr 1.16(b))	6-3 =	3	X \$ 78.00 =	\$ 234.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$260.00 =	\$ 260.00
				BASIC FEE (37 CFR 1.16(a))	\$ 760.00
	Total of above Calculations =				\$2784.00
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				0
	TOTAL =				\$2784.00

19. Small entity status

- a. ☐ A Small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

20. ☒ A check in the amount of \$ 2784.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.


22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205.

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME LEONARD P. DIANA, ESQ.

SIGNATURE



DATE

December 3, 1999

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:)
 : Examiner: NYA
 RYOJI FUKUDA)
 : Group Art Unit: NYA
 Application No.: NYA)
 :
 Filed: Herewith)
 :
 For: COORDINATES CORRECTION)
 APPARATUS, COORDINATES :
 CORRECTION PARAMETER)
 CALCULATION APPARATUS, :
 COORDINATES CORRECTION)
 METHOD, COORDINATES :
 CORRECTION PARAMETER)
 CALCULATION METHOD, :
 MEMORY MEDIUM FOR STORING)
 COORDINATES CORRECTION :
 CONTROL PROGRAM, AND)
 MEMORY MEDIUM FOR STORING :
 COORDINATES CORRECTION)
 PARAMETER CALCULATION :
 PROGRAM) December 3, 1999

The Assistant Commissioner for Patents
 Washington, D.C. 20231

PRELIMINARY AMENDMENT

Sir:

Preliminary to examination, please amend the above-identified application, filed herewith, as follows:

IN THE CLAIMS

Please amend Claim 14 as follows:

Claim 14, line 2, change "13" to --12--.

REMARKS

By this Preliminary Amendment, an improper multiple dependency has been eliminated from the claims.

Applicant's undersigned attorney may be reached in our New York office by telephone at (212) 218-2100 or by facsimile at (212) 218-2200. All correspondence should continue to be directed to our address given below.

Respectfully submitted,


Attorney for Applicant

Registration No. 28246

FITZPATRICK, CELLA, HARPER & SCINTO
30 Rockefeller Plaza
New York, New York 10112-3801

COORDINATES CORRECTION APPARATUS, COORDINATES
CORRECTION PARAMETER CALCULATION APPARATUS,
COORDINATES CORRECTION METHOD, COORDINATES
CORRECTION PARAMETER CALCULATION METHOD,
5 MEMORY MEDIUM FOR STORING COORDINATES
CORRECTION CONTROL PROGRAM, AND MEMORY
MEDIUM FOR STORING COORDINATES
CORRECTION PARAMETER CALCULATION PROGRAM

10 BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to a coordinates
correction apparatus including a coordinates input area
for correcting the received coordinates of a location
15 optionally indicated on the coordinates input area, a
coordinates correction method, and a memory medium that
can be read by a computer storing a control program for
the coordinates correction process.

The present invention also relates to a
20 coordinates correction parameter calculation apparatus
for calculating coordinates correction parameters for
correcting the coordinates of a location optionally
indicated on the coordinates input area, a coordinates
correction parameter calculation method, and a memory
25 medium that can be read by a computer storing a program
for performing coordinates correction parameter
calculation.

Related Background Art

Conventionally, for correction of input coordinates in coordinates input apparatuses, a method has been employed in which coordinates correction parameters are calculated by solving simultaneous equations expressed by linear conversion from the raw coordinate values obtained from several locations used as reference points on the coordinates input area of the coordinates input apparatus, substituting the input coordinates into the linear conversion formulas, as shown in Japanese Patent Application Laid-Open Nos. 5-313822 and 8-171451 and Japanese Patent No. 2,517,664.

Such a correction parameter calculation method is described below. First, two reference points (X_0 , Y_0) and (X_1 , Y_1) are set on the coordinates input area of the coordinates input apparatus and the position of those reference points are indicated with a mark. These indicators are displayed on a display apparatus such as a liquid crystal display installed under a transparent coordinates input area, for example. Next, raw coordinates data for two points are input from a coordinates input apparatus when the user points to the position at which the user sees the marks by eye (for example using an indication tool for coordinates input in the form of a pen). The input raw coordinates data (x_{nw} , y_{nw}) and (x_{se} , y_{se}) will form the following relationship with the original coordinates of the two

standard points.

[Equation 1]

$$X_0 = ax_{nw} + b$$

$$Y_0 = cy_{nw} + d$$

$$5 \quad \bar{X}_1 = ax_{se} + b$$

$$Y_1 = cy_{se} + d$$

(a, b, c, and d are constants)

Correction parameters a, b, c, and d are found from the formulas as follows.

[Equation 2]

$$a = \frac{X_1 - X_0}{X_{se} - X_{nw}}$$

$$b = \frac{X_0 X_{se} - X_1 X_{nw}}{X_{se} - X_{nw}}$$

$$c = \frac{Y_1 - Y_0}{Y_{se} - Y_{nw}}$$

$$d = \frac{Y_0 Y_{se} - Y_1 Y_{nw}}{Y_{se} - Y_{nw}}$$

Calculating the parameters as above and using them for correction of the input coordinates is effective when the coordinates detection characteristic of the

15 coordinates input apparatus is parallel to the X-axis and the Y-axis. However, in general there is often an incline with respect to the axis. Thus, a correction

method was also conceived of using three reference points (X_0, Y_0) , (X_1, Y_1) and (X_2, Y_2) where the relationship between the raw coordinates data is as follows:

5 [Equation 3]

$$X_0 = ax_{nw} + by_{nw} + c$$

$$Y_0 = dx_{nw} + ey_{nw} + f$$

$$X_1 = ax_{se} + by_{se} + c$$

$$Y_1 = dx_{se} + ey_{se} + f$$

10 $X_2 = ax_{ne} + by_{ne} + c$

$$Y_2 = dx_{ne} + ey_{ne} + f$$

(a, b, c, d, e, and f are constants)

The correction parameters a, b, c, d, e, and f are found from the following formulas.

15 [Equation 4]

$$a = \frac{(X_2 - X_0)(Y_{se} - Y_{nw}) - (X_1 - X_0)(Y_{ne} - Y_{nw})}{(X_{ne} - X_{nw})(Y_{se} - Y_{nw}) - (X_{se} - X_{nw})(Y_{ne} - Y_{nw})}$$

$$b = \frac{(X_2 - X_0)(X_{se} - X_{nw}) - (X_1 - X_0)(X_{ne} - X_{nw})}{(Y_{ne} - Y_{nw})(X_{se} - X_{nw}) - (Y_{se} - Y_{nw})(X_{ne} - X_{nw})}$$

$$c = X_0 - ax_{nw} - by_{nw}$$

$$d = \frac{(Y_2 - Y_0)(Y_{se} - Y_{nw}) - (Y_1 - Y_0)(Y_{ne} - Y_{nw})}{(X_{ne} - X_{nw})(Y_{se} - Y_{nw}) - (X_{se} - X_{nw})(Y_{ne} - Y_{nw})}$$

$$e = \frac{(Y_2 - Y_0)(X_{se} - X_{nw}) - (Y_1 - Y_0)(X_{ne} - X_{nw})}{(Y_{ne} - Y_{nw})(X_{se} - X_{nw}) - (Y_{se} - Y_{nw})(X_{ne} - X_{nw})}$$

$$f = Y_0 - dx_{nw} - ey_{nw}$$

When these coordinates correction parameters are established, the input coordinates are corrected based on the formulas below, and output to, for example, a liquid crystal display serving as a coordinates output means.

After finding the correction parameters, when the coordinates are actually input, the correction formulas are expressed as:

$$X = ax + b$$

$$Y = cx + d$$

using the correction parameters a, b, c, and d when there are two reference points in the correction method using two reference points. When using the correction method having three reference points, the formulas are expressed:

$$X = ax + by = C$$

$$Y = dx + ey + f$$

using correction parameters a, b, c, d, e, and f.

Further, in Japanese Patent Application Laid-Open No. 8-171451, in order to compensate for the nonlinear characteristic of the coordinates input apparatus, an embodiment is disclosed in which the territory is finely divided by 20 reference points and the correction parameters are sought for each territory through the method of seeking the correction parameters with three reference points.

SUMMARY OF THE INVENTION

There is a so-called resistance membrane type coordinates input apparatus in which the coordinates input area comprises a resistance membrane and the
5 input coordinates of a position indicated on the coordinates input area are detected by the voltage responding to the resistance of the resistance membrane. In these types of coordinates input apparatuses, the resistance member within the
10 resistance membranes on the market are sometimes not vaporized uniformly and linearity between the input coordinates and the voltage detected from the resistance membrane may not be found.

In an apparatus comprising a coordinates input
15 part using such a resistance membrane, the electrical detection characteristic of the input coordinates becomes nonlinear, and discrepancies in the input coordinates particularly at the outer periphery of the coordinates input area become striking.

20 Given the parts of such a coordinates input part, the coordinates correction method using two or three reference points for the above conventional coordinates input apparatuses cannot be applied, and only a method such as in Japanese Patent Application Laid-Open No. 8-
25 171451 can be performed. However, with this method, one must either set many reference points or it is necessary to keep many correction parameters or an

operation for determining territories is necessary. These problems can of course be mentioned in relation to correction of input coordinates in other types of coordinates input apparatuses other than resistance membrane types as well.

Thus, the aim of the present invention is to be able to perform coordinates input with high precision even when the electrical characteristic relating to coordinates detection of the coordinates input part is not linear by performing correction of input coordinates accurately in response to such nonlinearity.

The present invention is a coordinates correction apparatus including a parameter keeping means for keeping quadratic nonlinear conversion constants as coordinates correction parameters, a coordinates correction method, and a memory medium storing a coordinates correction control program which receives coordinates of locations optionally indicated on a coordinates input area and corrects the received coordinates by a coordinate reception step by quadratic nonlinear conversion using the coordinates correction parameters kept in the parameter keeping means.

Preferably, the present invention further comprises a parameter calculation step for calculating the coordinates correction parameters for nonlinear conversion and keeping the coordinates correction

parameters by the parameter keeping means.

The present invention is further a coordinates correction parameter calculation apparatus including a coordinates input area for calculating the coordinates correction parameters for correcting the coordinates of locations optionally indicated on a coordinates input area by nonlinear conversion, a coordinates correction parameter calculation method, and a memory medium storing a coordinates correction parameter calculation program which receives from the coordinates input apparatus coordinates of indicated locations corresponding to multiple reference points with differing locations established on the coordinates input area and calculates the nonlinear equation type coordinates correction parameters for coordinates correction by solving the simultaneous equations by applying the received coordinates to the nonlinear equations for coordinates correction.

In the embodiments to be described below, in such a coordinates correction apparatus, a coordinates correction method, and a memory medium that can be read by a computer storing a control program for coordinates correction processing, even if the coordinates detection characteristic is not linear due to the quality of the parts of the coordinates input part of the coordinates input apparatus or such, in response to this accurate correction of the input coordinates and

highly precise coordinates input can be performed because secondary nonlinear conversion constants are kept as parameters for correcting the input coordinates and the input coordinates are corrected by secondary
5 nonlinear conversion using these parameters.

Further, even if the electrical characteristic relating to the coordinates detection of the coordinates input apparatus is nonlinear, calculation of coordinates correction parameters for performing
10 correction of the input coordinates can be performed with high precision simply and with low construction costs and the manufacturing costs of the coordinates input apparatus for performing correction of the input coordinates using coordinates correction parameters
15 calculated in this way can be reduced.

Further, coordinates correction parameters in the form of nonlinear conversion correction formula constants can be calculated based on simple coordinates input merely by indicating four reference points
20 established on the coordinates input area.

Further, by performing correction of the input coordinates with nonlinear conversion correction formulas using the calculated coordinates correction parameters, even if the electrical characteristic
25 relating to the coordinates detection of the coordinates input part is not linear, accurate correction can be performed corresponding to the input

from the user and coordinates input can be performed with high precision. Further, the manufacturing costs of the apparatus can be reduced.

Other aims and benefits of the present invention
5 will become clear from the detailed description,
attached Figures, and the Claims to follow.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the basic
10 construction of the first embodiment of the present
invention.

Fig. 2 is a flowchart showing the procedure of the
coordinates correction process of the first embodiment.

Fig. 3 is a block diagram showing the construction
15 of the actual hardware of the first embodiment.

Fig. 4 is a block diagram showing the basic
construction of the second embodiment of the present
invention.

Fig. 5 is a block diagram showing the construction
20 of the actual hardware of the second embodiment.

Fig. 6 is a flowchart showing the procedure of the
coordinates correction process of the second
embodiment.

Fig. 7 is a drawing showing the appearance of the
25 marks of the reference points displayed on the
coordinates input screen in the second and third
embodiments.

Fig. 8 is a block diagram showing the basic construction of the third embodiment of the present invention.

Fig. 9 is a block diagram showing the construction of the actual hardware of the third embodiment of the present invention.

Fig. 10 is a flowchart showing the procedure of the coordinates correction process of the third embodiment.

Fig. 11 is a drawing showing one form of a portable information processing apparatus possible as an embodiment of the present invention.

Fig. 12 is a drawing showing that the portable information processing apparatus possible as an embodiment of the present invention can be connected to an external device through a network.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Following, several embodiments of the present invention are described.

[Embodiment 1]

Fig. 1 shows the basic construction of the coordinates input apparatus according to the first embodiment of the present invention.

As shown here, the apparatus of the present embodiment includes a coordinates input means 101, a parameter keeping means 102, a coordinates correction

means 103, and a coordinates output means 104.

The coordinates input means 101 includes a coordinates input area and coordinates of locations optionally indicated on the coordinates input area are
5 detected and input. The parameter keeping means 102 keeps parameters for correcting the values of the input coordinates. Using the parameters kept in the parameter keeping means, the coordinates correction means 103 corrects the values of the coordinates input
10 by the coordinates input means 101. The coordinates output means 104 outputs the coordinates corrected by the coordinates correction means 103.

Here, as the particular characteristic of the present invention, quadratic nonlinear conversion
15 constants are kept as parameters for correction in the parameter keeping means 102 and the coordinates correction means 103 corrects the input coordinates by performing secondary nonlinear conversion based on these constants and outputs to the coordinates output
20 means 104.

Next, the actual construction of the hardware of the apparatus of the present embodiment is described with reference to Fig. 3.

In Fig. 3, 301 is a coordinates input part which
25 serves as the coordinates input means 101 of Fig. 1 constructed, for example, of the resistance membrane type described above, comprising (not illustrated) a

transparent resistance membrane which forms the
coordinates input area, a drive circuit for reading the
coordinates of a position on the resistance membrane
indicated by a coordinates input indication tool in pen
5 form by voltage, and an A/D conversion circuit for A/D
conversion of the read output into coordinates data.

The input coordinates data detected in the
coordinates input part 301 are transferred to the I/O
controller 302. The I/O controller 302 sends the
10 coordinates data to a bus 306 and a CPU 303 following
orders from the CPU 303.

As well as controlling the entire apparatus, the
CPU 303 fulfills the roll of the coordinates correction
means of Fig. 1 and performs correction of the
15 coordinates. The details of that process will be
described in detail later. Within the CPU 303, RAM
304, ROM 305, and VRAM 307 memories are connected via
the bus 306.

RAM 304 is used as the work area of the CPU 303.
20 ROM 305 fulfills the role of the parameter keeping
means 102 of Fig. 1, with secondary nonlinear
conversion constants (to be given later) written in
designated areas in advance as the parameters for
correcting the input coordinates. There are solid-
25 state differences to each of the coordinates input
parts 301 and it is necessary to perform a correction
on each of the coordinates input parts 301 loaded on

each coordinates input apparatus at time of shipment from the factory. At that time, the individual coordinates correction parameters for each unit are decided as a result of the correction and written on
5 the loaded ROM 305 of the apparatus.

Further, a control program executed by the CPU 303 for control is written on the ROM 305. A program for performing the aforementioned coordinates correction process is included in this control program. The CPU
10 303 fulfills the role of coordinates correction means 103 by executing this program.

The ROM 305 corresponds to the embodiment of the memory medium that can be read by the computer for storing the control program for coordinates correction
15 in the present invention.

The VRAM 307 keeps display data written in from the CPU 303 and displays it on a liquid crystal display 309 controlled by a display controller 308. Input coordinates data corrected by the CPU 303 acting as the
20 coordinates correction means 103 are included in this display data. In other words, VRAM 307, the display controller 308, and the liquid crystal display 309 comprise the coordinates output means 104 of Fig. 1 and display and output the corrected input coordinates.

25 The liquid crystal display 309 is placed underneath the coordinates input area constructed from a transparent resistance membrane of the coordinates

input part 301.

Next, the operation of the correction process for input coordinates by the CPU 303 functioning as the coordinates correction means 103 is described using the flowchart of Fig. 2. The control program for the correction process corresponding to this flowchart is stored on ROM 305 and executed by the CPU 303.

First, coordinates input is performed by the coordinates input part 301 in step S201. The coordinates obtained here are (x, y).

Next, the coordinates correction parameters are read-in from ROM 305 in step S202. The parameters read-in here are quadratic nonlinear conversion constants:

xy constant a for correction of the x coordinate,
x constant b for correction of the x coordinate,
y constant c for correction of the x coordinate,
constant d for correction of the x coordinate,
xy constant e for correction of the y coordinate,
x constant f for correction of the y coordinate,
y constant g for correction of the y coordinate, and
constant h for correction of the y coordinate.

Next, correction of the input coordinates (x, y) is performed in step S203. If the corrected coordinates here are (X, Y), the correction formula is expressed as the quadratic nonlinear conversion formulas:

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h$$

Finally, the corrected coordinates (X, Y) are sent to VRAM 307 and displayed on the liquid crystal display
5 309 in step S204.

As above, because in the first embodiment
correction of the input coordinates is performed by
secondary nonlinear conversion if the electrical
characteristic relating to the coordinates detection of
10 the coordinates input part of the coordinates input
apparatus is not linear the input coordinates can be
accurately corrected in response to this and highly
precise coordinates input can be performed.

In the first embodiment the control program of the
15 parameters for correcting the input coordinates and for
the correction process was stored in ROM 305, but it
can also be stored in a memory medium that can be read
by another computer, such as a disk or memory card, and
can be used by reading-in to RAM 304 from the memory
20 medium.

[Embodiment 2]

In the first embodiment, the coordinates
correction parameters are mentioned in connection with
25 the coordinates input apparatus as written on the ROM
305 in advance, but in the second embodiment a
coordinates correction parameter calculation apparatus

for calculating coordinates correction parameters is described.

The basic functional structure of the coordinates correction parameter calculation apparatus of the second embodiment is described in Fig. 4. In Fig. 4 the coordinates correction parameter calculation apparatus is composed of means keyed 402 to 408 and the calculated coordinates correction parameters are set in a coordinates input apparatus 401.

10 In the present embodiment, in order to calculate the coordinates correction parameters for correcting the input coordinates input from the coordinates input apparatus 401, a first through a fourth reference point with differing locations are displayed on the
15 coordinates input area of the coordinates input apparatus 401 and four coordinates are input by indicating these reference points.

A first through a fourth coordinates keeping means 403 to 406 are installed corresponding one to one to
20 the first through the fourth reference points in the coordinates correction parameter calculation apparatus. Further, an input coordinates discriminating and storing means 402 is installed which stores the four coordinates input from the coordinates input apparatus
25 401 by indicating a first through a fourth reference point as described above and discriminates the order of the reference points and divides them among the

corresponding first through fourth coordinates keeping means 403 to 406. Further, a parameter calculation means 407 is installed which calculates the coordinates correction parameters by solving simultaneous equations based on the four coordinates stored in the first through the fourth coordinates keeping means 403 to 406 by the input coordinates discriminating and storing means 402 and sends them to the parameter output means 408. The parameter output means 408 outputs the parameters to the outside.

Next, the actual hardware of the coordinates correction parameter calculation apparatus is described in Fig. 5. In Fig. 5, the coordinates correction parameter calculation apparatus is constructed of elements keyed 502 to 507.

The coordinates input apparatus 401 is constructed of either an aforementioned resistance membrane type or another type of input apparatus. The coordinates data input from the coordinates input apparatus 401 is transferred to a CPU 503 via an I/O controller 502 and a bus 506. The I/O controller 502 performs data transmission for input of the coordinates data or output of coordinates correction parameters under the control of the CPU 503.

The I/O controller 502 is connected to RAM 504 and ROM 505 via the bus 506 in the CPU 503.

The CPU 503 fulfills the role of the input

coordinates discriminating and storing means 402 and the parameter calculation means 407 of Fig. 4 as well as performing control of the coordinates correction parameter calculation apparatus as a whole by executing the control program stored in ROM 505. In other words, a program, to be described later, in which the CPU 503 executes the input coordinates discrimination and storing means 402 and the parameter calculation means 407 is included in the control program stored on ROM 505. ROM 505 corresponds to an embodiment of the memory medium that can be read by a computer storing a program for performing coordinates correction parameter calculation in the present invention.

RAM 504 fulfills the role of the first through fourth coordinates keeping means 403 to 406 of Fig. 4. In other words, a first through a fourth coordinates keeping area comprising multiple addresses for keeping coordinates data corresponding one to one to the first through the fourth reference points is established within RAM 504.

A ROM writer 507 is connected to the I/O controller 502. This ROM writer 507 corresponds to the parameter output means 408 of Fig. 4 and writes the coordinates correction parameters from the CPU 503 to be described later onto a ROM (not shown in the drawing). This unillustrated ROM is loaded on the coordinates input apparatus 401 after the coordinates

correction parameters are written in and used for coordinates correction.

Next, the operations of coordinates correction parameter calculation of the CPU 503 are described in the flowchart of Fig. 6. A program of the processing procedure corresponding to the flowchart of Fig. 6 is stored in ROM 505 and executed by the CPU 503.

First, four coordinates are input when the operator of the apparatus indicates a first through a fourth reference point with differing locations on the coordinates input area of the coordinates input apparatus 401 in the first step, S601.

In order to do this, as shown in Fig. 7, four reference point marks 703 to 706 are displayed in advance on the coordinates input area 702 of the coordinates input apparatus indicating a first through a fourth reference point with differing locations and these points are indicated (contacted) by a coordinates input indication tool in the form of a pen, for example. The coordinates of the locations of these marks 703 to 706, or in other words the coordinates of the locations of the first through the fourth reference points, become the coordinates used for reference in parameter calculation, described below. Therefore, they should be established with a suitable distance between them such that rounding-off errors during calculation do not become too large. The coordinates

of the locations of the reference point marks 703 to 706 are given here as (X_0, Y_0) , (X_1, Y_0) , (X_0, Y_1) , and (X_1, Y_1) in order to simplify the calculations.

The display of these marks 703 to 706 is temporary. For example, the marks can be displayed if the material of the resistance membrane or such that comprises the coordinates input area 702 is transparent and layered on a display apparatus such as a liquid crystal display.

10 Next, it is determined which of the input coordinates before correction (x, y) indicated by the above indication corresponds to which of the reference points, the first through the fourth, represented by the reference point marks 703 to 706 in step S602. The
15 distance between the input coordinates (x, y) and each of the first through the fourth reference point coordinates (X_0, Y_0) , (X_1, Y_0) , (X_0, Y_1) , and (X_1, Y_1) is calculated, the distances are compared, and the reference point the shortest distance from the
20 coordinates is the one entered.

Next, in step S603 the data of the input coordinates (x, y) is stored in the area corresponding to the reference point it was determined to correspond to in step S602, among the first through the fourth coordinates keeping areas in RAM 504.

25 Next, in step S604 it is determined whether or not coordinates input has been completed for all four

reference point marks 703 to 706. Then, either steps S601 through S604 are repeated by returning to step S601 if input is not complete, or it advances to step S605 if input is complete.

5 The input coordinates corresponding to the four reference point marks 703 to 706 are given here as (x_{nw}, y_{nw}) , (x_{ne}, y_{ne}) , (x_{sw}, y_{sw}) , and (x_{se}, y_{se}) . The subscripts of each variable nw, ne, sw, and se stand for, respectively, northwest, northeast, southwest, and
10 southeast. In other words, they express the direction of the reference points from the center of the coordinates input area of the coordinates in put apparatus when north is considered the upward
15 direction.

15 In step S605, parameters for correction of the input coordinates are calculated by solving simultaneous equations based on the four coordinate, (x_{nw}, y_{nw}) , (x_{ne}, y_{ne}) , (x_{sw}, y_{sw}) , and (x_{se}, y_{se}) stored in the first through the fourth coordinates keeping areas
20 in RAM 504 input as above.

 The formulas below are the simultaneous equations based on the four coordinates. As for the basic correction formula for coordinates correction, if the corrected coordinates are (X, Y) , then in a nonlinear
25 conversion formula including the quadratic term(xy) (where a, b, c, d, e, f, g, and h are constants):

$$X = ax_y + bx + cy + d$$

$$Y = ex_y + fx + gy + h$$

When the input coordinates of the four reference points above are applied to these formulas, the following

5 simultaneous equations are formed:

[Equation 5]

$$X_0 = ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d$$

$$Y_0 = ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h$$

$$X_1 = ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d$$

$$10 Y_0 = ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h$$

$$X_0 = ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d$$

$$Y_1 = ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h$$

$$X_1 = ax_{se}y_{se} + bx_{se} + cy_{se} + d$$

$$Y_1 = ex_{se}y_{se} + fx_{se} + gy_{se} + h$$

15

Solving these equations, the following are expressed as functions:

[Equation 6]

$$a = A(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

$$20 b = B(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

$$c = C(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

$$d = D(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

$$e = E(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

$$f = F(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

$$25 g = G(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

$$h = H(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})$$

(where $A()$, $B()$, $C()$, $D()$, $E()$, $F()$, $G()$, and $H()$ are

functions). In step S605, coordinates correction parameters a, b, c, d, e, f, g, and h are found by substituting the actual coordinates values for each of these functions.

5 The actual process of solving the simultaneous equations is now explained.

First,

[Equation 7]

$$\begin{aligned}
 & X_n = X_{ne} - X_{nw} \\
 10 \quad & Y_n = Y_{ne} - Y_{nw} \\
 & X_s = X_{se} - X_{sw} \\
 & Y_s = Y_{se} - Y_{sw} \\
 & X_e = X_{se} - X_{ne} \\
 & Y_e = Y_{se} - Y_{ne} \\
 15 \quad & X_w = X_{sw} - X_{nw} \\
 & Y_w = Y_{sw} - Y_{nw} \\
 & Z_n = X_{ne}Y_{ne} - X_{nw}Y_{nw} \\
 & Z_s = X_{se}Y_{se} - X_{sw}Y_{sw} \\
 & Z_e = X_{se}Y_{se} - X_{ne}Y_{ne} \\
 20 \quad & Z_w = X_{sw}Y_{sw} - X_{nw}Y_{nw}
 \end{aligned}$$

Then,

[Equation 8]

$$\begin{aligned}
 & X_v = Z_sX_n - Z_nX_s \\
 & Y_v = Z_sY_n - Z_nY_s \\
 25 \quad & Z_v = X_sY_n - X_nY_s \\
 & X_h = Z_eX_w - Z_wX_e \\
 & Y_h = Z_eY_w - Z_wY_e
 \end{aligned}$$

$$z_h = x_e y_w - x_w y_e$$

$$y_{we} = y_w - y_e$$

$$y_{ns} = y_n - y_s$$

and,

5 [Equation 9]

$$n_x = (X_1 - X_0) y_{ns}$$

$$n_y = (Y_1 - Y_0) y_{we}$$

$$m = y_v z_h - y_h z_v$$

10 If here $x_e = x_w$ or $y_n = y_s$, m is either 0 or so close to 0 that it can not be used as a divisor.

In this situation, the nonlinear component may be almost invisible. Therefore, if $x_e = x_w$ or $y_n = y_s$

[Equation 10]

15

$$A() = 0$$

$$B() = \frac{X_1 - X_0}{x_e}$$

$$C() = 0$$

$$D() = X_0 - x_{nw}$$

20

$$E() = 0$$

$$F() = 0$$

$$G() = \frac{Y_1 - Y_0}{y_e}$$

$$H() = Y_0 - y_{nw}$$

25

Or, if $x_e \neq x_w$ or $y_n \neq y_s$

[Equation 11]

$$A() = \frac{z_h n_x}{m}$$

$$B() = -\frac{y_h n_x}{m}$$

$$C() = \frac{x_h n_x}{m}$$

$$D() = X_0 - \frac{((z_h y_{nw} - y_h) x_{nw} + x_h y_{nw}) n_x}{m}$$

$$E() = -\frac{z_v n_y}{m}$$

$$F() = \frac{y_v n_y}{m}$$

$$G() = -\frac{x_v n_y}{m}$$

$$H() = Y_0 + \frac{((z_v y_{nw} - y_v) x_{nw} + x_v y_{nw}) n_y}{m}$$

The values of a, b, c, e, f, and g are small and demand high precision when actually solved for.

Therefore if real numbers are used in the calculations of the CPU 503 or performing simultaneous calculation for high speed by 32 bit integral calculation, it is realistic to keep a, b, c, e, f, and h to approximate values of 10^4 and to divide by the same value during correction.

Finally, in step S606, the calculated coordinates correction parameters are output to the ROM writer 507 and the process is completed. The ROM writer 507

writes the coordinates correction parameters on the unillustrated ROM attached to it. This unillustrated ROM is loaded on the coordinates input apparatus 401 after writing-in, and used to keep the coordinates
5 correction parameters for correcting the input coordinates in the coordinates input apparatus 401.

According to the above process, merely by indicating the first through the fourth reference points on the coordinate input area of the coordinates
10 input apparatus and inputting those coordinates, coordinates correction parameters a to h can be simply calculated and written-in on a ROM loaded on the coordinates input apparatus. In the coordinates input apparatus loaded with this ROM, the values of a to h
15 written on the ROM are applied to the nonlinear conversion correction formulas including the quadratic term (x, y):

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h$$

20 and highly precise correction of the input coordinates can be performed even if the electrical characteristic relating to coordinates detection of the coordinates input apparatus is not linear due to the quality of the construction materials of the coordinates input
25 apparatus by performing correction of the input coordinates by calculating the correction formulas. Thus, because the characteristic need not be linear,

production costs of the coordinates input apparatus can be reduced.

Further, in the coordinates correction parameter calculation apparatus of the present embodiment, the input coordinates discrimination and storing means 402 and the parameter calculation means 407 can be realized when the CPU 503 executes the program inside the ROM 505 and the first through the fourth coordinates keeping means 403 to 406 can be realized by the RAM 504. Therefore, the construction of the hardware of the apparatus is simple and the apparatus can be produced at low cost.

[Embodiment 3]

Next, the basic functional construction of the coordinates input apparatus of Embodiment 3 of the present invention is explained by Fig. 8. The coordinates input apparatus of Embodiment 3 having processes corresponding to the coordinates input process of Embodiment 1 and the coordinates correction parameter calculation process of Embodiment 2 are explained.

In Fig. 8, the apparatus of the present embodiment comprises a coordinates input means 801 including a coordinates input area, a switching means 802, a first through a fourth coordinates keeping means 803 to 806, a parameter calculation means 807, a parameter keeping

means 808, an input coordinates correction means 809, and a coordinates output means 810.

In the coordinates input means 801, a first through a fourth reference point with differing
5 locations are established in order to calculate coordinates correction parameters for correcting the input coordinates and the four coordinates of these points are input when the user indicates each of the reference points.

10 When the coordinates are input from the coordinates input area of the coordinates input means 801, the switching means 802 switches such that correction of the input coordinates input into the input coordinates correction means 809 is carried out
15 if coordinates correction parameters are kept in the parameter keeping means 808 and calculation of coordinates correction parameters by the parameter calculation means 807 is carried out by storing the input coordinates in the first through the fourth input
20 coordinates keeping means 803 to 806 if coordinates correction parameters are not kept.

The first through the fourth coordinates keeping means 803 to 806 are installed corresponding one to one to the first through the fourth reference points in
25 order to keep the four input coordinates by indicating the first through the fourth reference points on the coordinates input area.

The parameter calculation means 807 calculates the coordinates correction parameters by solving simultaneous equations based on those four coordinates if the four coordinates are kept in the coordinates
5 keeping means 803 to 806, and sends them to the parameter keeping means 808.

The parameter keeping means 808 keeps the coordinates correction parameters calculated and sent from the parameter calculation means 807.

10 The input coordinates correction means 809 corrects the input coordinates via the switching means 802 from the coordinates input area of the coordinates input means 801 using the coordinates correction parameters kept in the parameter keeping means 808 and
15 sends them to the coordinates output means 810.

Next, the actual hardware construction of the coordinates input apparatus is explained through Fig. 9.

In the construction of Fig. 9, the coordinates
20 input part 901 is either the aforementioned resistance membrane type or another type. The coordinates data input from the coordinates input area of the coordinates input part 901 is sent to a CPU 903 via an I/O controller 902 and a bus 906. The I/O controller
25 902 performs transfer of the input coordinates data and the coordinates correction parameters described below under the control of the CPU 903.

The I/O controller 902, RAM 904, a mask ROM 905, VRAM 907, and a flush ROM 911 are connected via the bus 906 in the CPU 903.

The CPU 903 fulfills the role of the switching means 802, the parameter calculation means 807, and the input coordinates correction means 809 of Fig. 8 as well as performing control of the entire coordinates input apparatus by executing a control program stored in the mask ROM 905. In other words, a program for the processes to be described later in which the CPU 903 executes the switching means 802, the parameter calculation means 807, and the input coordinates correction means 809 is included in the control program stored in the mask ROM 905. The mask ROM 905 corresponds to an embodiment of the memory medium that can be read by a computer storing a control program for performing the coordinates correction process of the present invention.

RAM 904 fulfills the role of the first through the fourth coordinates keeping means 803 to 806 of Fig. 8. In other words, a first through a fourth coordinates keeping area comprising multiple addresses for keeping coordinates data corresponding one to one to the first through the fourth reference points is established within RAM 904.

Further, display data (image data) including the corrected coordinates data after the CPU 903 has

corrected the input coordinates is written-in on the
VRAM 907 and this data is displayed and output to a
liquid crystal display 909 via the display controller
908. In other words, the coordinates output means 810
5 of Fig. 8 comprises VRAM 907, the display controller
908, and the liquid crystal display 909. The
coordinates input area of the coordinates input part
901 is transparent and the liquid crystal display 909
is placed underneath it such that the display of the
10 liquid crystal display 909 can be seen through the
coordinates input area.

Further, the flush ROM 911 fulfills the role of
the parameter keeping means 808 of Fig. 8. A ROM
writer 910 is connected inside the flush ROM 911, the
15 CPU 903 transmits the calculated coordinates correction
parameters to the ROM writer 910 via the bus 906 and
the I/O controller, and the ROM writer 910 writes in
the coordinates correction parameters to the flush ROM
911.

20 Next, the operations of the switching means 802,
the parameter calculation means 807, and the input
coordinates correction means 809 performed by the CPU
903 are described by the flowchart of Fig. 10. The
control program for the process procedure corresponding
25 to the flowchart of Fig. 10 is stored in the mask ROM
905 and executed by the CPU 903.

In the third embodiment, in order to perform

calculation of the coordinates correction parameters,
four coordinates are input when the operator of the
apparatus indicates a first through a fourth reference
point with differing locations established on the
5 coordinates input area of the coordinates input
apparatus 1.

In order to do so, as shown in Fig. 7, a first
through a fourth reference point mark 703 to 706
representing the first through the fourth reference
10 point with differing locations are displayed in advance
on the coordinates input area 702 of the coordinates
input apparatus, and these are indicated (contacted) by
a coordinates input indication tool in the form of a
pen, for example. The coordinates of these marks 703
15 to 706, or in other words the coordinates of the
locations of the first through the fourth reference
points become the coordinates for reference in the
parameter calculations described below. Therefore they
should be established with a suitable distance between
20 them such that rounding-off errors during calculation
are not too large. In order to simplify the
calculation here, the coordinates of the locations of
the reference point marks 703 to 706 are given as four
coordinates expressed in pairs of two X coordinates and
25 two Y coordinates (X_0, Y_0), (X_1, Y_0), (X_0, Y_1), and ($X_1,$
 Y_1). These marks 703 to 706 are displayed by the liquid
crystal display 909.

In the process in Fig. 10, first the first through the fourth coordinates input is performed from the coordinates input area of the coordinates input means 801 by the user in step S1001. Next it moves to step 5 S1002. Steps S1002, S1003, and S1004 serve as the switching means 802.

In step S1002, it is determined whether or not calculation of the coordinates correction parameters is completed, in other words, whether or not coordinates 10 correction parameters have already been written in to the parameter keeping means 808 (the flush ROM 911) and kept, and moves to step S1003 if they are not kept. In this case, the coordinates input in step S1001 are considered to be the coordinates input corresponding to 15 one of the first through the fourth reference points for coordinates correction parameter calculation and the process below step S1003 is performed.

In step S1003, the coordinates (x, y) input in step S1001 are determined to correspond to one of 20 either the first through the fourth reference points indicated by the reference point marks 703 to 706 and the input coordinates (x, y) data is stored in one area corresponding to the reference point as a result of the above determination among the first through the fourth 25 coordinates keeping areas in RAM 904. For example, if it is determined that the input coordinates correspond to the first reference point, the input coordinates

data are stored in the first coordinates keeping area corresponding to the first reference point.

The above determination is decided by calculating the respective distances between the input coordinates
5 (x, y) and the original coordinates (X_0 , Y_0), (X_1 , Y_0), (X_0 , Y_1), and (X_1 , Y_1) of each of the four reference points and comparing those distances. The input coordinates are determined to correspond to the reference point the smallest distance away.

10 At this time, the liquid crystal display 909 may be controlled such that the reference marks 703 to 706 displayed disappear as the corresponding reference points are entered. By doing so, it is easier for the user to understand which of the reference points has
15 been input among the four points.

Next, in step S1004 it is determined whether or not all coordinates have been input corresponding to the four reference points 703 to 706 and the storage of the input coordinates to the first through the fourth
20 coordinates keeping areas in RAM 904 has been completed. If it has not been completed it returns to step S1001 and repeats the step S1001 to S1004 process; if it has been completed it advances to S1005.

Here the input coordinates corresponding to the
25 four reference point marks 703 to 706 are respectively (x_{nw} , y_{nw}), (x_{ne} , y_{ne}), (x_{sw} , y_{sw}), and (x_{se} , y_{se}). The subscripts of each coordinate nw, ne, sw, and se mean

respectively northwest, northeast, southwest and
southeast. In other words, they express the direction
of the location of the reference points from the center
of the coordinates input area of the coordinates input
5 apparatus if north is the upward direction.

In step S1005 a process is performed as the
parameter calculation means 807. In other words, the
parameters for correcting the input coordinates are
calculated by solving the simultaneous equations based
10 on the four coordinates (x_{nw} , y_{nw}), (x_{ne} , y_{ne}), (x_{sw} , y_{sw}),
and (x_{se} , y_{se}) stored in the first through the fourth
coordinates keeping areas in the RAM 904 input as
above.

Here the formulas below are the simultaneous
15 equations based on the four coordinates. As for the
basic correction formula for coordinates correction, if
the corrected coordinates are (X, Y), then in a
nonlinear conversion formula including the quadratic
term (xy) (where a, b, c, d, e, f, g, and h are
20 constants):

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h$$

When the input coordinates of the four reference points
above are applied, the following simultaneous equations
25 are formed:

[Equation 12]

$$\begin{aligned}
 X_0 &= ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d \\
 Y_0 &= ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h \\
 X_1 &= ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d \\
 Y_0 &= ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h \\
 X_0 &= ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d \\
 Y_1 &= ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h \\
 X_1 &= ax_{se}y_{se} + bx_{se} + cy_{se} + d \\
 Y_1 &= ex_{se}y_{se} + fx_{se} + gy_{se} + h
 \end{aligned}$$

10

Solving these equations the following is expressed as functions:

[Equation 13]

$$\begin{aligned}
 a &= A(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se}) \\
 b &= B(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se}) \\
 c &= C(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se}) \\
 d &= D(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se}) \\
 e &= E(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se}) \\
 f &= F(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se}) \\
 g &= G(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se}) \\
 h &= H(X_0, X_1, x_{nw}, y_{nw}, x_{ne}, y_{ne}, x_{sw}, y_{sw}, x_{se}, y_{se})
 \end{aligned}$$

(where $A()$, $B()$, $C()$, $D()$, $E()$, $F()$, $G()$, and $H()$ are functions). In step S1005, the coordinates correction parameters a , b , c , d , e , f , g , and h are sought by substituting the actual coordinate values for each of these functions.

Now the actual process of solving the simultaneous

equations is explained. First:

[Equation 14]

$$\begin{aligned}
 & \mathbf{x}_n = \mathbf{x}_{ne} - \mathbf{x}_{nw} \\
 & \mathbf{y}_n = \mathbf{y}_{ne} - \mathbf{y}_{nw} \\
 5 \quad & \mathbf{x}_s = \mathbf{x}_{se} - \mathbf{x}_{sw} \\
 & \mathbf{y}_s = \mathbf{y}_{se} - \mathbf{y}_{sw} \\
 & \mathbf{x}_e = \mathbf{x}_{se} - \mathbf{x}_{ne} \\
 & \mathbf{y}_e = \mathbf{y}_{se} - \mathbf{y}_{ne} \\
 & \mathbf{x}_w = \mathbf{x}_{sw} - \mathbf{x}_{nw} \\
 10 \quad & \mathbf{y}_w = \mathbf{y}_{sw} - \mathbf{y}_{nw} \\
 & \mathbf{z}_n = \mathbf{x}_{ne} \mathbf{y}_{ne} - \mathbf{x}_{nw} \mathbf{y}_{nw} \\
 & \mathbf{z}_s = \mathbf{x}_{se} \mathbf{y}_{se} - \mathbf{x}_{sw} \mathbf{y}_{sw} \\
 & \mathbf{z}_e = \mathbf{x}_{se} \mathbf{y}_{se} - \mathbf{x}_{ne} \mathbf{y}_{ne} \\
 & \mathbf{z}_w = \mathbf{x}_{sw} \mathbf{y}_{sw} - \mathbf{x}_{nw} \mathbf{y}_{nw}
 \end{aligned}$$

15 Then,

[Equation 15]

$$\begin{aligned}
 & \mathbf{x}_v = \mathbf{z}_s \mathbf{x}_n - \mathbf{z}_n \mathbf{x}_s \\
 & \mathbf{y}_v = \mathbf{z}_s \mathbf{y}_n - \mathbf{z}_n \mathbf{y}_s \\
 & \mathbf{z}_v = \mathbf{x}_s \mathbf{y}_n - \mathbf{x}_n \mathbf{y}_s \\
 20 \quad & \mathbf{x}_h = \mathbf{z}_e \mathbf{x}_w - \mathbf{z}_w \mathbf{x}_e \\
 & \mathbf{y}_h = \mathbf{z}_e \mathbf{y}_w - \mathbf{z}_w \mathbf{y}_e \\
 & \mathbf{z}_h = \mathbf{x}_e \mathbf{y}_w - \mathbf{x}_w \mathbf{y}_e \\
 & \mathbf{y}_{we} = \mathbf{y}_w - \mathbf{y}_e \\
 & \mathbf{y}_{ns} = \mathbf{y}_n - \mathbf{y}_s
 \end{aligned}$$

25 and,

[Equation 16]

$$n_x = (X_1 - X_0)Y_{ns}$$

$$n_y = (Y_1 - Y_0)Y_{ye}$$

$$m = Y_v Z_h - Y_h Z_v$$

- 5 If $x_e = x_w$ or $y_n = y_s$, then m will be 0 or so close to 0 that m can not be used as a divisor.

In this situation the nonlinear component may be almost invisible. Therefore if $x_e = x_w$ or $y_n = y_s$:

[Equation 17]

10

$$A() = 0$$

$$B() = \frac{X_1 - X_0}{x_n}$$

$$C() = 0$$

$$D() = X_0 - x_{nw}$$

15

$$E() = 0$$

$$F() = 0$$

$$G() = \frac{Y_1 - Y_0}{y_e}$$

$$H() = Y_0 - y_{nw}$$

- 20 If $x_e \neq x_w$ and $y_n \neq y_s$, then the parameters can be found by:

[Equation 18]

$$A() = \frac{z_h n_x}{m}$$

25

$$B() = -\frac{y_h n_x}{m}$$

$$C() = \frac{x_h n_x}{m}$$

$$D() = X_0 - \frac{((Z_h y_{nw} - y_h) x_{nw} + x_h y_{nw}) n_x}{m}$$

$$E() = -\frac{z_v n_y}{m}$$

$$5 \quad F() = \frac{y_v n_y}{m}$$

$$G() = -\frac{x_v n_y}{m}$$

$$H() = Y_0 + \frac{((z_v y_{nw} - y_v) x_{nw} + x_v y_{nw}) n_y}{m}$$

10 When actually solving the equations, because the values of a, b, c, e, f, and g are small and high precision is demanded, if using real numbers in the calculations of the CPU 503 or performing simultaneous calculation for high speed by 32 bit integral

15 calculation, it is realistic to keep a, b, c, e, f, and h are kept as approximate values of 10^4 and to divide by the same value during correction.

20 Next, in step S1006, the calculated coordinates correction parameters are output to the ROM writer 910, written in the flush ROM 911 and kept. When step S1006 is completed it returns to step S1001.

25 When the calculation of the coordinates correction parameters in step S1002 is completed, in other words when it is determined that the coordinates correction parameters are already written in and kept in the flush ROM 910 as the parameter keeping means 1008, it moves to step S1007. In this case, it performs the processes

from step S1007 and following, deciding that the coordinates input of step S1001 is not input for coordinates correction parameter calculation but for performing normal functions.

5 Steps S1007 and S1008 perform their processes as the input coordinates correction means. In other words, first the coordinates correction parameters a, b, c, d, e, f, g, and h are read from the flush ROM 911 in step S1007.

10 Next, correction of the input coordinates is performed in step S1008 using the parameters read as above. Here the corrected coordinates (X, Y) are found by substituting the values of the read parameters a to h for the input coordinates (x, y) in the basic
15 correction formula given above:

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h$$

Next, in step S1009 the corrected coordinates data (X, Y) is written in VRAM 907 as display data and
20 displayed and output to the liquid crystal display 909 via the display controller 908. Thus the process is completed.

By performing the above flowchart operations, the coordinates correction parameters are calculated and
25 kept, the input coordinates are corrected using these parameters, and the function of the coordinates input apparatus can be fulfilled.

Here, the operations the operator of the apparatus performs in order to calculate the coordinates correction parameters are extremely simple, being merely to indicate (contact) each of the four reference point marks 703 to 706 displayed on the coordinates input area 702 of the apparatus with a coordinates input indication tool in the form of a pen, for example. The coordinates correction parameters a, b, c, d, e, f, g, and h can be calculated as constants of the nonlinear conversion formulas including the quadratic term (xy):

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h$$

based on the simple coordinates input.

Thus, because correction of the input coordinates is performed by these nonlinear conversion formulas, even if the electrical characteristic relating to the coordinates detection is not linear due to the quality of the parts of the coordinates input means 801 for example, accurate correction can be performed in response and the coordinates input can be performed with high precision. Further, because the electrical characteristic of the coordinates detection of the coordinates input means 801 does not have to be linear, the production costs of the apparatus can be reduced.

[Embodiment 4]

The coordinates input apparatus of the above first through the third embodiments can use a portable information processing apparatus such as a Personal
5 Digital Assistant (PDA) or a notebook personal computer.

Fig. 11 shows one embodiment of a portable information processing apparatus.

The portable information processing apparatus of
10 Fig. 11 comprises a display part 1102 such as a liquid crystal display doubling as the coordinates input part, interfaces with an external apparatus (wireless communication interfaces such as an IrDA or wire communication interfaces such as an RS-422) 1103 and
15 1104, a coordinates input indication pen 1106, a storage part 1105 for storing the coordinates input indication pen in the main body, buttons 1107 to 1109 used as directional keys or decision buttons, and a memory medium slot 1110 for a memory medium such as a
20 flush memory or a floppy disk.

Reference point marks such as those shown in Fig. 7 are displayed on the display part 1102 of the portable information processing apparatus 1101 and the processes indicated in Embodiments 1 to 3 can be
25 performed by indicating these reference point marks with the coordinates input indication pen 1106.

A program corresponding to each of the flowcharts

shown in Embodiments 1 to 3 can also be stored in advance in the memory medium housed in the portable information processing apparatus 1101 or the program can be executable by attaching a memory medium holding the program to the memory medium slot 1110. Further, the program can be executable supplied from an external apparatus through the interface 1103 (or 1104). In this case, the external apparatus (sending apparatus) which sends the program comprises the present invention because the supplied program itself is the embodiment.

The portable information processing apparatus 1101 can be connected to an external apparatus using the interfaces 1103 or 1104 with an external apparatus. Fig. 12 shows one embodiment of connection with an external apparatus.

In Fig. 12, the portable information processing apparatus 1101 can be connected to information processing apparatuses 1202 and 1203 such as personal computers through a wireless or wire network 1204.

Further, the information processing apparatus 1202 (or 1203) can be used as the coordinates correction parameter calculation apparatus. In this case, the information processing apparatus 1202 is made such that it can receive the coordinates input from the portable information processing apparatus 1101 through the network or such, calculate the coordinates correction parameters, and store them on a flush ROM or the like

(not shown in the Figure) within the portable information processing apparatus 1101 again through the network or the like. The information processing apparatus 1202 could also be made to store the
5 calculated coordinates correction parameters in a memory medium such as a flash memory and supply the coordinates correction parameters to the portable information processing apparatus 1101 by attaching the memory medium to the memory medium slot 1110.

10 As is clear from the above description, according to the Embodiments 1 to 4, in a coordinates correction apparatus, a coordinates correction method, and a memory medium that can be read by a computer storing a control program for the coordinates correction process,
15 quadratic nonlinear conversion constants are kept as parameters for correcting input coordinates, and the input coordinates are corrected by the quadratic nonlinear conversion using these parameters, so that even if the coordinates detection characteristic is not
20 linear due to such factors as the quality of the parts of the coordinates input part of the coordinates input apparatus, correction of the input coordinates can be accurately performed in response and highly precise coordinates input can be performed.

25 Further, according to the Embodiments 1 to 4, calculation of coordinates correction parameters for performing highly precise correction of input

coordinates can be performed with a simple, low-cost construction even if the electrical characteristic of the coordinates detection of the coordinates input apparatus is not linear, and as a result the production costs of the coordinates input apparatus for performing correction of input coordinates using the calculated coordinates correction parameters can be reduced.

Further, according to Embodiments 1 to 4, coordinates correction parameters can be calculated as nonlinear conversion correction formula constants based on simple coordinates input merely by indicating four reference points established on a coordinates input area.

Further, by performing correction of input coordinates with nonlinear conversion correction formulas using the calculated coordinates correction parameters, even if the electrical characteristic of the coordinates detection of the coordinates input part is not linear, suitable correction of the user's input and highly precise coordinates input can be performed. The production costs of the device can be further reduced.

WHAT IS CLAIMED IS:

1. A coordinates correction apparatus comprising:
a coordinates reception means for receiving
coordinates from a coordinates input means of locations
5 optionally indicated on a coordinates input area of the
coordinates input means;

a parameter keeping means for keeping quadratic
nonlinear conversion constants as coordinates
correction parameters for correction of the coordinates
10 received by the coordinates reception means; and

a coordinates correction means for correcting the
coordinates received by the coordinates reception means
by quadratic nonlinear conversion using the coordinates
correction parameters kept by the coordinates keeping
15 means.

2. The coordinates correction apparatus of Claim
1, wherein the coordinates correction parameters of the
parameter keeping means are a, b, c, d, e, f, g, and h
20 and the quadratic nonlinear conversion for correcting
the coordinates (x, y) received by the coordinates
reception means to corrected coordinates (X, Y) is
expressed by:

$$\begin{aligned} X &= axy + bx + cy + d \\ 25 \quad Y &= exy + fx + gy + h. \end{aligned}$$

3. The coordinates correction apparatus of Claim

1, further comprising a coordinates input means.

4. The coordinates correction apparatus of Claim
1, further comprising a coordinates output means for
5 outputting the coordinates corrected by the coordinates
correction means.

5. The coordinates correction apparatus of Claim
1, further comprising a parameter calculation means for
10 calculating the coordinates correction parameters for
nonlinear conversion and keeping the nonlinear
conversion coordinates correction parameters by the
parameter keeping means.

15 6. The coordinates correction apparatus of Claim
5, wherein the parameter calculation means calculates
the coordinates correction parameters based on the
coordinates of locations indicating multiple reference
points established on the coordinates input area.

20 7. The coordinates correction apparatus of Claim
6, wherein the parameter calculation means further
comprises a discrimination means for discriminating
which of the multiple reference points indicated
25 corresponds to the coordinates of an indicated
location.

8. The coordinates correction apparatus of Claim
6, wherein the parameter calculation means calculates
coordinates correction parameters by solving
simultaneous equations based on the indicated
5 coordinates corresponding to the multiple reference
points.

9. The coordinates correction apparatus of Claim
6, wherein the multiple reference points are displayed
10 by a liquid crystal display.

10. The coordinates correction apparatus of Claim
6, wherein four designated coordinates expressed in
pairs of two x coordinates and two y coordinates are
15 used as the multiple reference points if the
coordinates system on the coordinates input area is a
coordinates system expressed in an xy rectangular
coordinates system.

20 11. The coordinates correction apparatus of Claim
10, wherein the parameter calculation means calculates
the coordinates correction parameters a, b, c, d, e, f,
g, and h by solving the following formulas where the
coordinates of the four reference points as (X_0, Y_0) ,
25 (X_1, Y_0) , (X_0, Y_1) , and (X_1, Y_1) , setting the coordinates
of the pointed locations with aiming at points as $(x_{nw},$
 $y_{nw})$, (x_{ne}, y_{ne}) , (x_{sw}, y_{sw}) , and (x_{se}, y_{se}) ;

$$X_0 = ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d$$

$$Y_0 = ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h$$

$$X_1 = ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d$$

$$Y_0 = ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h$$

$$5 \quad X_0 = ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d$$

$$Y_1 = ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h$$

$$X_1 = ax_{se}y_{se} + bx_{se} + cy_{se} + d$$

$$Y_1 = ex_{se}y_{se} + fx_{se} + gy_{se} + h$$

10 the parameter keeping means keeps the coordinates correction parameters; and

the coordinates correction means corrects the coordinates (x, y) received from the coordinates reception means to corrected coordinates (X, Y) by the quadratic nonlinear conversion:

15

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h.$$

12. The coordinates correction apparatus of Claim 5, further comprising a switching means for causing the correction of coordinates by the coordinates correction means if coordinates correction parameters are kept by the parameter keeping means or causing the calculation of coordinates correction parameters by the parameter calculation means if coordinates correction parameters are not held by the parameter keeping means when the coordinates reception means receives indicated

20

25

coordinates.

13. The coordinates correction apparatus of
Claims 1 to 12, wherein the coordinates correction
5 apparatus is a portable information processing
apparatus.

14. The coordinates correction apparatus of
Claims 1 to 13, wherein the coordinates correction
10 apparatus can be connected to a network.

15. A coordinates correction parameter
calculation apparatus for calculating coordinates
correction parameters for coordinates correction of
locations arbitrarily pointed to in a coordinates input
area included in a coordinates input apparatus by
nonlinear conversion, comprising:

a coordinates reception means for receiving
coordinates of locations pointed to with aiming at
20 multiple reference points set at different locations in
the coordinates input area from the coordinates input
apparatus; and

a parameter calculation means for calculating
nonlinear formula coordinates correction parameters for
25 coordinates correction by solving simultaneous
equations established by substituting the coordinates
received by the coordinates reception means in the

nonlinear equations for coordinates correction.

16. The coordinates correction parameter calculation apparatus of Claim 15, further comprising a
5 parameter output means for outputting the coordinates correction parameters calculated by the parameter calculation means to an external device.

17. The coordinates correction parameter
10 calculation apparatus of Claim 16, wherein the parameter output means is a device for writing the coordinates correction parameters calculated by the parameter calculation means onto a memory medium.

18. The coordinates correction parameter
15 calculation apparatus of Claim 17, wherein the parameter output means is a ROM writer for writing the coordinates correction parameters calculated by the parameter calculation means onto a ROM.

19. The coordinates correction parameter
20 calculation apparatus of Claim 15, wherein the parameter calculation means further comprises a discrimination means for discriminating which of the multiple reference points corresponds to the coordinates of the indicated location.

20. The coordinates correction parameter calculation apparatus of Claim 15, wherein four designated coordinates expressed in pairs of two x coordinates and two y coordinates are used as the multiple reference points in the case that the coordinate input area is expressed in an xy rectangular coordinates system.

21. The coordinates correction parameter calculation apparatus of Claim 20, wherein the parameter calculation means calculates the coordinates correction parameters a, b, c, d, e, f, g, and h, when the nonlinear equations for coordinates correction for correcting the coordinates (x, y) received from the coordinates reception means to the corrected coordinates (X, Y) are expressed by the quadratic nonlinear equations represented by

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h,$$

by solving the following formulas where the coordinates of the four reference points as (X_0, Y_0) , (X_1, Y_0) , (X_0, Y_1) , and (X_1, Y_1) , setting the coordinates of the pointed locations with aiming at points as (x_{nw}, y_{nw}) , (x_{ne}, y_{ne}) , (x_{sw}, y_{sw}) , and (x_{se}, y_{se}) :

$$X_0 = ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d$$

$$Y_0 = ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h$$

$$X_1 = ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d$$

$$Y_0 = ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h$$

$$5 \quad X_0 = ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d$$

$$Y_1 = ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h$$

$$X_1 = ax_{se}y_{se} + bx_{se} + cy_{se} + d$$

$$Y_1 = ex_{se}y_{se} + fx_{se} + gy_{se} + h.$$

10 22. A coordinates correction method for
controlling the coordinates correction apparatus,
comprising the steps of:

receiving coordinates of locations arbitrarily
pointed to on a coordinates input area;

15 keeping quadratic nonlinear conversion constants
as coordinates correction parameters; and

correcting the coordinates received in the
coordinates receiving step by quadratic nonlinear
conversion using the coordinates correction parameters
20 kept in the parameter keeping step.

23. The coordinates correction method of Claim
22, wherein the coordinates correction parameters in
said parameter keeping step are a, b, c, d, e, f, g,
25 and h, and the quadratic nonlinear conversion for
correcting the coordinates (x, y) received from the
coordinates reception means to the corrected

coordinates (X, Y) in said coordinates correction step is represented by

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h.$$

5

24. The coordinates correction method of Claim 22, further comprising an indication step of indicating the coordinates on the coordinates input area.

10

25. The coordinates correction method of Claim 22, further comprising a coordinates output step of outputting the coordinates corrected in the coordinates correction step.

15

26. The coordinates correction method of Claim 22, further comprising a parameter calculation step of calculating the coordinates correction parameters for nonlinear conversion and causing the coordinates correction parameters to be kept by the parameter keeping means.

20

27. The coordinates correction method of Claim 26, wherein the coordinates correction parameters are calculated in based on the coordinates of locations pointed to with aiming at multiple reference points set on the coordinates input area.

25

28. The coordinates correction method of Claim
27, wherein the parameter calculation step further
comprises a discrimination step of determining which of
the multiple reference points corresponds to the
5 coordinates of an pointed location.

29. The coordinates correction method of Claim
27, wherein coordinates correction parameters are
calculated in the parameter calculation step by solving
10 simultaneous equations based on the indicated
coordinates corresponding to the multiple reference
points.

30. The coordinates correction method of Claim
15 27, wherein the multiple reference points are displayed
by a liquid crystal display.

31. The coordinates correction method of Claim
27, wherein four designated coordinates expressed in
20 pairs of two x coordinates and two y coordinates are
used as the multiple reference points in the case that
on the coordinates input area is expressed in an xy
rectangular coordinates system.

25 32. The coordinates correction method of Claim
31, wherein coordinates correction parameters, a, b, c,
d, e, f, g, and h, are calculated in the parameter

calculation step by solving the following formulas
where the coordinates of the four reference points as
(X₀, Y₀), (X₁, Y₀), (X₀, Y₁), and (X₁, Y₁), setting the
coordinates of the pointed locations with aiming at

5 points as (x_{nw}, y_{nw}), (x_{ne}, y_{ne}), (x_{sw}, y_{sw}), and (x_{se}, y_{se}):

$$X_0 = ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d$$

$$Y_0 = ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h$$

$$X_1 = ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d$$

$$Y_0 = ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h$$

10 $X_0 = ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d$

$$Y_1 = ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h$$

$$X_1 = ax_{se}y_{se} + bx_{se} + cy_{se} + d$$

$$Y_1 = ex_{se}y_{se} + fx_{se} + gy_{se} + h;$$

the coordinates correction parameters are kept in

15 the parameter keeping step; and

the coordinates (x, y) received in the coordinates
reception step are corrected to corrected coordinates
(X, Y) in the coordinates correction steps by the
quadratic nonlinear conversion:

20 $X = axy + bx + cy + d$

$$Y = exy + fx + gy + h.$$

33. The coordinates correction method of Claim
26, further comprising a switching step of causing the
25 correction of coordinates by the coordinates correction
step if coordinates correction parameters are kept by
the parameter keeping step or causing the calculation

of coordinates correction parameters by the parameter calculation step if coordinates correction parameters are not held by the parameter keeping step when the coordinates reception step receives indicated coordinates.

34. The coordinates correction method of Claims 22 to 33 which is a coordinates correction method for controlling a portable information processing apparatus.

35. A coordinates correction parameter calculation method for calculating coordinates correction parameters for coordinates correction of locations arbitrarily pointed to on a coordinates input area included in a coordinates input apparatus by nonlinear conversion, comprising:

a coordinates reception step of receiving from the coordinates input apparatus the coordinates of indicated locations corresponding to multiple reference points with differing locations established on the coordinates input area; and

a parameter calculation step of calculating the coordinates correction parameters of nonlinear equations for coordinates correction by solving simultaneous equations by applying the coordinates received by the coordinates reception step to the

coordinates correction nonlinear equations.

36. The coordinates correction parameter calculation method of Claim 35, further comprising a
5 parameter output step for outputting the coordinates correction parameters calculated in the parameter calculation step to an external device.

37. The coordinates correction parameter
10 calculation method of Claim 36, wherein the coordinates correction parameters calculated in the parameter calculation step are written in the parameter output step onto a memory medium.

38. The coordinates correction parameter
15 calculation method of Claim 37, wherein the coordinates correction parameters calculated in the parameter calculation step are written in the parameter output step onto a ROM.

20 39. The coordinates correction parameter calculation method of Claim 35, wherein the parameter calculation step further comprises a discrimination step of discriminating which of the multiple reference
25 points corresponds to the coordinates of an pointed location.

40. The coordinates correction parameter calculation method of Claim 35, wherein four designated coordinates expressed in pairs of two x coordinates and two y coordinates are used as the multiple reference points in the case that the coordinate input area is expressed in an xy rectangular coordinates system.

41. The coordinates correction parameter calculation method of Claim 40, wherein the parameter calculation means calculates the coordinates correction parameters a, b, c, d, e, f, g, and h, when the nonlinear equations for coordinates correction for correcting the coordinates (x, y) received from the coordinates reception means to the corrected coordinates (X, Y) are expressed by the quadratic nonlinear equations represented by

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h,$$

by solving the following formulas where the coordinates of the four reference points as (X_0, Y_0) , (X_1, Y_0) , (X_0, Y_1) , and (X_1, Y_1) , setting the coordinates of the pointed locations with aiming at points as (x_{nw}, y_{nw}) , (x_{ne}, y_{ne}) , (x_{sw}, y_{sw}) , and (x_{se}, y_{se}) :

$$X_0 = ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d$$

$$Y_0 = ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h$$

$$X_1 = ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d$$

$$Y_0 = ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h$$

$$X_0 = ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d$$

$$Y_1 = ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h$$

$$X_1 = ax_{se}y_{se} + bx_{se} + cy_{se} + d$$

$$Y_1 = ex_{se}y_{se} + fx_{se} + gy_{se} + h.$$

5

42. A computer readable memory medium for storing a coordinates correction control program for controlling a coordinates correction apparatus comprising the steps of:

- 10 receiving coordinates of locations arbitrarily pointed to in a coordinates input area;
keeping quadratic nonlinear conversion constants as coordinates correction parameters; and
15 correcting the coordinates received in the coordinates reception step by quadratic nonlinear conversion using coordinates correction parameters kept by the parameter keeping means.

43. The computer readable memory medium of Claim 20 42, wherein the coordinates correction parameters in the parameter keeping step are a, b, c, d, e, f, g, and h and the quadratic nonlinear conversion for correcting the coordinates (x, y) received from the coordinates reception step to the corrected coordinates (X,Y) in the
25 coordinates correction step is represented by

$$X = axy + bx + cy + d$$

$$Y = exy + fx + gy + h.$$

44. The computer readable memory medium for storing a coordinates correction control program of Claim 42, further comprising an indication step of point coordinates in the coordinates input area.

5

45. The computer readable memory medium for storing a coordinates correction control program of Claim 42, further comprising a coordinates output step of outputting coordinates corrected in the coordinates correction step.

10

46. The computer readable memory medium for storing a coordinates correction control program of Claim 42, further comprising a parameter calculation step of calculating the coordinates correction parameters for nonlinear conversion and causing the coordinates correction parameters to be kept by the parameter keeping means.

15

47. The computer readable memory medium for storing a coordinates correction control program of Claim 46, wherein the coordinates correction parameters are calculated in the parameter calculation step based on the coordinates of locations pointed to with aiming at multiple reference points set on the coordinates input area.

20
25

48. The computer readable memory medium for storing a coordinates correction control program of Claim 47, wherein the parameter calculation step further comprises a discrimination step of determining which of the multiple reference points corresponds to the coordinates of an pointed location.

49. The memory medium that can be read by a computer storing a coordinates correction control program of Claim 47, wherein coordinates correction parameters are calculated in the parameter calculation step by solving simultaneous equations based on the indicated coordinates corresponding to the multiple reference points.

50. The memory medium that can be read by a computer storing a coordinates correction control program of Claim 47, wherein the multiple reference points are displayed by a liquid crystal display.

51. The memory medium that can be read by a computer storing a coordinates correction control program of Claim 47, wherein four designated coordinates expressed in pairs of two x coordinates and two y coordinates are used as the multiple reference points in the case that on the coordinates input area is expressed in an xy rectangular coordinates system.

52. The memory medium that can be read by a computer storing a coordinates correction control program of Claim 51, wherein the coordinates correction parameters are calculated in the parameter calculation step, a, b, c, d, e, f, g, and h, by solving the following formulas where the coordinates of the four reference points as (X_0, Y_0) , (X_1, Y_0) , (X_0, Y_1) , and (X_1, Y_1) , setting the coordinates of the indicated locations corresponding to these as (x_{nw}, y_{nw}) , (x_{ne}, y_{ne}) , $(x_{sw},$

10 $y_{sw})$, and (x_{se}, y_{se}) :

$$X_0 = ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d$$

$$Y_0 = ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h$$

$$X_1 = ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d$$

$$Y_0 = ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h$$

15 $X_0 = ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d$

$$Y_1 = ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h$$

$$X_1 = ax_{se}y_{se} + bx_{se} + cy_{se} + d$$

$$Y_1 = ex_{se}y_{se} + fx_{se} + gy_{se} + h$$

the coordinates correction parameters are kept in the parameter keeping step; and

the coordinates (x, y) received from the coordinates reception step are corrected to corrected coordinates (X, Y) in the coordinates correction steps corrects by the quadratic nonlinear conversion:

25 $X = axy + bx + cy + d$

$$Y = exy + fx + gy + h.$$

53. The computer readable memory medium for storing a coordinates correction control program of Claim 56, further comprising a switching step of causing the correction of coordinates by the
5 coordinates correction step if coordinates correction parameters are kept by the parameter keeping step or causing the calculation of coordinates correction parameters by the parameter calculation step if coordinates correction parameters are not held by the
10 parameter keeping step when the coordinates reception step receives indicated coordinates.

54. The computer readable memory medium for storing a coordinates correction control program of
15 Claims 42 to 53, which is a coordinates correction program for controlling a portable information processing apparatus.

55. A computer readable memory medium for storing
20 a coordinates correction parameter calculation program for calculating coordinates correction parameters for coordinates correction of locations arbitrarily pointed to on a coordinates input area of a coordinates input apparatus by nonlinear conversion, comprising:
25 a coordinates reception step of receiving from the coordinates input apparatus the coordinates of indicated locations corresponding to multiple

reference points with differing locations established on the coordinates input area; and

a parameter calculation step of calculating the coordinates correction parameters of nonlinear equations for coordinates correction by solving
5 simultaneous equations by applying the coordinates received by the coordinates reception step to the coordinates correction nonlinear equations.

10 56. The memory medium that can be read by a computer storing a coordinates correction parameter calculation program of Claim 55 further comprising a parameter output step for outputting the coordinates correction parameters calculated by the parameter
15 calculation step to an external device.

57. The memory medium that can be read by a computer storing a coordinates correction parameter calculation program of Claim 56, wherein the
20 coordinates correction parameters calculated in the parameter calculation step are written in the parameter output step onto a memory medium.

58. The memory medium that can be read by a
25 computer storing a coordinates correction parameter calculation program of Claim 57, wherein the coordinates correction parameters calculated in the

parameter calculation step are written in the parameter output step onto a ROM.

59. The memory medium that can be read by a
5 computer storing a coordinates correction parameter calculation program of Claim 55, wherein the parameter calculation step further comprises a discrimination step of discriminating which of the multiple reference points corresponds to the coordinates of an pointed
10 location.

60. The memory medium that can be read by a
computer storing a coordinates correction parameter calculation program of Claim 55, wherein four
15 designated coordinates expressed in pairs of two x coordinates and two y coordinates are used as the multiple reference points in the case that on the coordinate input area is expressed in an xy rectangular coordinates system.

61. The memory medium that can be read by a
computer storing a coordinates correction parameter calculation program of Claim 60, wherein the parameter calculation means calculates the coordinates correction
25 parameters a, b, c, d, e, f, g, and h, when the nonlinear equations for coordinates correction for correcting the coordinates (x, y) received from the

coordinates reception means to the corrected coordinates (X, Y) are expressed by the quadratic nonlinear equations represented by

$$X = axy + bx + cy + d$$

$$5 \quad Y = exy + fx + gy + h$$

,by solving the following formulas where the coordinates of the four reference points as (X_0, Y_0) , (X_1, Y_0) , (X_0, Y_1) , and (X_1, Y_1) , setting the coordinates of the pointed locations with aiming at points as (x_{nw}, y_{nw}) , (x_{ne}, y_{ne}) , (x_{sw}, y_{sw}) , and (x_{se}, y_{se}) ;

$$10 \quad X_0 = ax_{nw}y_{nw} + bx_{nw} + cy_{nw} + d$$

$$Y_0 = ex_{nw}y_{nw} + fx_{nw} + gy_{nw} + h$$

$$X_1 = ax_{ne}y_{ne} + bx_{ne} + cy_{ne} + d$$

$$Y_1 = ex_{ne}y_{ne} + fx_{ne} + gy_{ne} + h$$

$$15 \quad X_0 = ax_{sw}y_{sw} + bx_{sw} + cy_{sw} + d$$

$$Y_1 = ex_{sw}y_{sw} + fx_{sw} + gy_{sw} + h$$

$$X_1 = ax_{se}y_{se} + bx_{se} + cy_{se} + d$$

$$Y_1 = ex_{se}y_{se} + fx_{se} + gy_{se} + h.$$

ABSTRACT OF THE DISCLOSURE

Conventionally, when the coordinates detection characteristic of a coordinates input apparatus was nonlinear correction of the input coordinates could not
5 always be accurately performed.

The present invention is a coordinates correction apparatus and a coordinates correction method including a parameter keeping means for keeping quadratic nonlinear conversion constants as coordinates
10 correction parameters and a memory medium storing a coordinates correction control program for receiving coordinates of locations optionally indicated on a coordinates input area and correcting the coordinates received in the coordinates reception step by quadratic
15 nonlinear conversion using the coordinates correction parameters kept by the parameter keeping means.

Preferably, it further comprises a parameter calculation step for calculating coordinate correction parameters for nonlinear conversion and causing the
20 coordinates correction parameters to be kept by the parameter keeping means.

Further, the present invention is a coordinates correction parameter calculation apparatus and a coordinates correction parameter calculation method for
25 calculating coordinates correction parameters for correction of the coordinates of locations optionally indicated on the coordinates input area of a

coordinates input apparatus by nonlinear conversion and
a memory medium storing a coordinates correction
parameter calculation program for receiving the
coordinates of indicated locations corresponding to
5 multiple reference points with differing locations
established on a coordinates input area from the
coordinates input apparatus and calculating the
nonlinear equation coordinates correction parameters
for coordinates correction by solving simultaneous
10 equations by applying the received coordinates to the
nonlinear equations for coordinates correction.

Given the embodiment of the present invention,
four coordinates are stored by a first through a fourth
coordinates keeping means via a switching means when
15 four coordinates are input indicating four reference
points established on the coordinates input area when
coordinates correction parameters are not kept in the
parameter keeping means. The parameter calculation
means calculates the coordinates correction parameters
20 for nonlinear conversion by solving simultaneous
equations based on these four coordinates and causes
the parameter keeping means to keep them. When
coordinates are input from the coordinates input part
when parameters are kept by the parameter keeping means
25 the switching means causes correction of the input
coordinates by the input coordinates correction means.
The input coordinates correction means corrects the

input coordinates accurately by nonlinear conversion using the parameters kept in the parameter keeping means and outputs the corrected coordinates to a coordinates output means.

FIG. 1

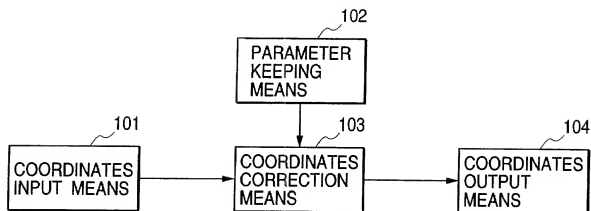


FIG. 2

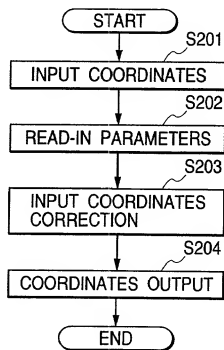


FIG. 3

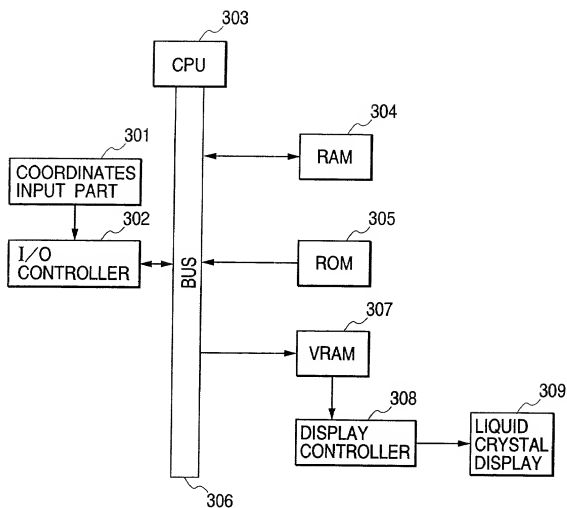


FIG. 4

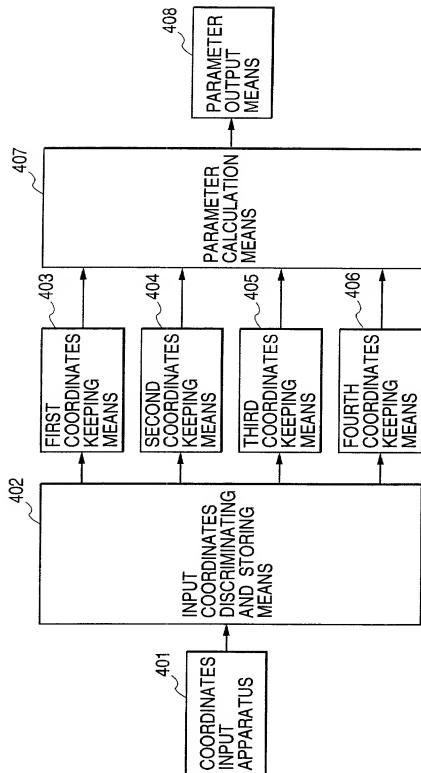


FIG. 5

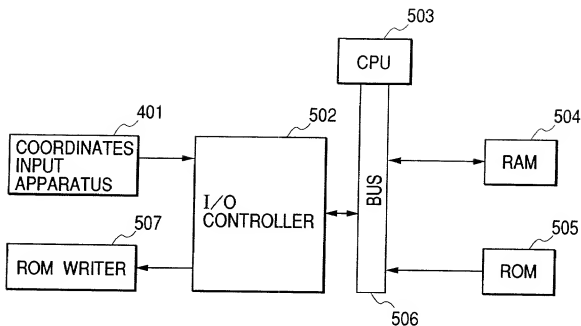


FIG. 7

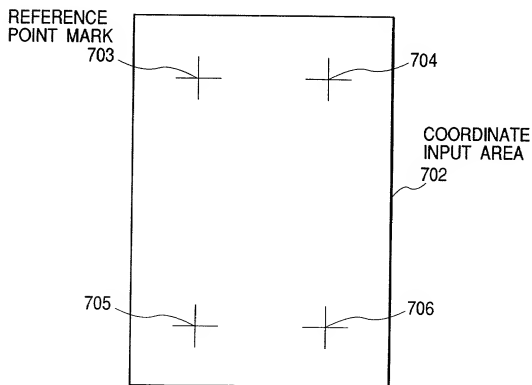


FIG. 6

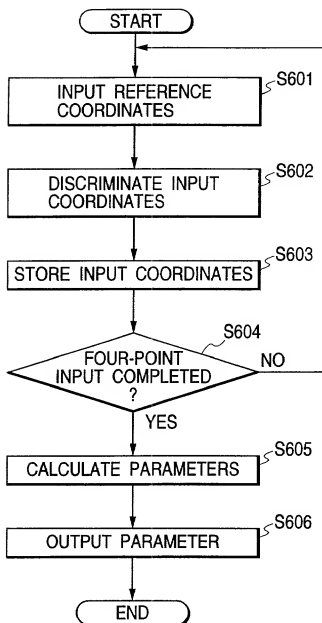


FIG. 8

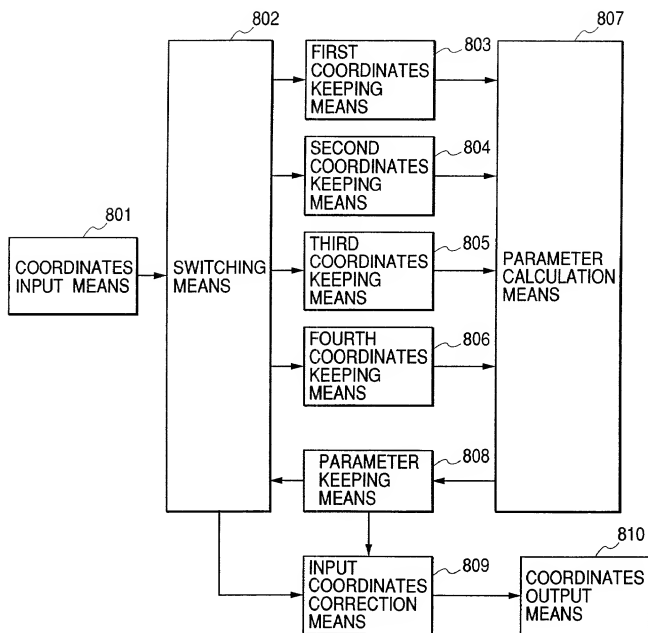


FIG. 9

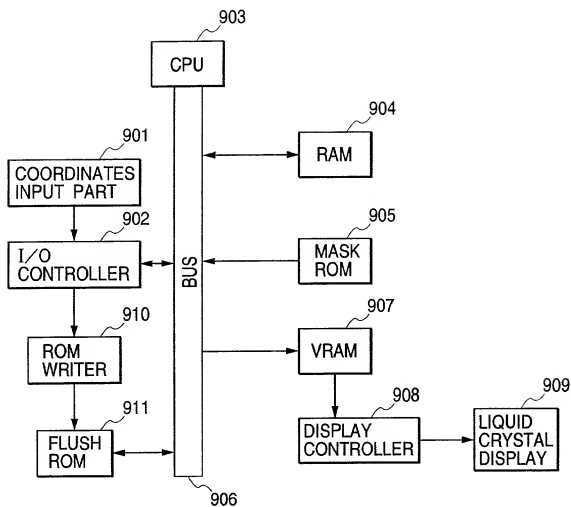


FIG. 10

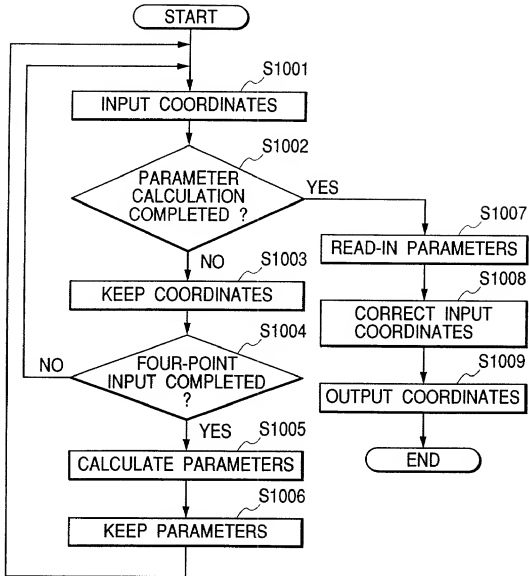


FIG. 11


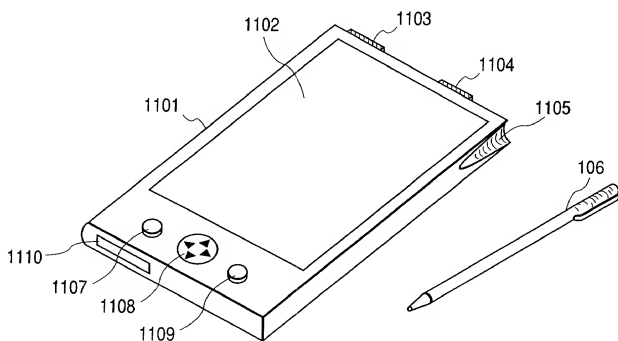


FIG. 12

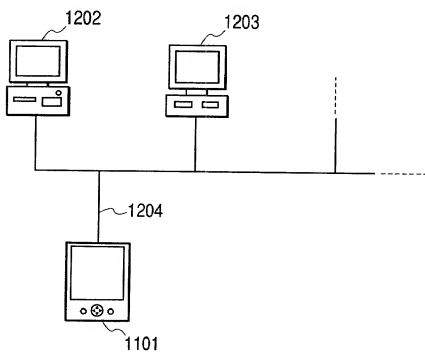

COMBINED DECLARATION AND POWER OF ATTORNEY
FOR PATENT APPLICATION
(Page 1)

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled COORDINATES CORRECTION APPARATUS, COORDINATES CORRECTION PARAMETER CALCULATION APPARATUS, COORDINATES CORRECTION METHOD, COORDINATES CORRECTION PARAMETER CALCULATION METHOD, MEMORY MEDIUM FOR STORING COORDINATES CORRECTION CONTROL PROGRAM, AND MEMORY MEDIUM FOR STORING COORDINATES CORRECTION PARAMETER CALCULATION PROGRAM, the specification of which is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §119(a)-(d) or §365(b), of any foreign application(s) for patent or inventor's certificate, or §365(a) of any PCT international application which designates at least one country other than the United States, listed below and have also identified below any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Country	Application No.	Filed (Day/Mo./Yr.)	(Yes/No) Priority Claimed
JAPAN	10-344964	DECEMBER 4, 1998	YES
JAPAN	10-368317	DECEMBER 25, 1998	YES
JAPAN	10-368318	DECEMBER 25, 1998	YES
JAPAN	11-328426	NOVEMBER 18, 1999	YES

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

Application No.	Filed (Day/Mo./Yr.)	Status (Patented, Pending, Abandoned)
-----------------	---------------------	--

I hereby appoint the practitioners associated with the firm and Customer Number provided below to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith, and direct that all correspondence be addressed to the address associated with that Customer Number:

FITZPATRICK, CELLA, HARPER & SCINTO
Customer Number: 05514

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor RYOJI FUKUDA
Inventor's signature _____
Date _____ Citizen/Subject of JAPAN
Residence 43-32, NAKAKIBOGAOKA, ASAHI-KU, YOKOHAMA-SHI, KANAGAWA-KEN,
JAPAN